INSTALLATION INSTRUCTIONS
FLAG/CEILING MOUNT

PARTS INCLUDED:

☐ EXIT SIGN
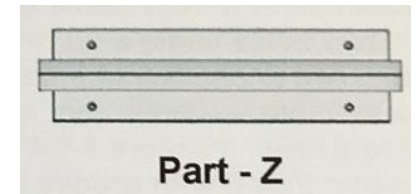☐ Part - Z (metal bracket: 4 circular holes)

Notes:
First determine location for the flag/ceiling-mounted exit sign.
Installer should use appropriate fasteners depending on type
of surface material.

INSTRUCTIONS:

1. Position Part - Z on wall or ceiling and mark holes.
2. Drill the four holes using a ¼" drill bit.
3. Install anchors (not included) in drilled holes. ***
4. Install appropriate fasteners.
5. Snap Exit Sign into place.
6. Once in place, Exit Sign can slide (ceiling-mount only)

EXIT sign

Part - Z

*** Ceiling and walls made of different materials require different types of fasteners. Use fasteners suitable for the ceilings or walls in your building.

Always install products in compliance with your local building code. Check your local code before you install any sign to ensure your installation meets all criteria.

INSTALLATION INSTRUCTIONS
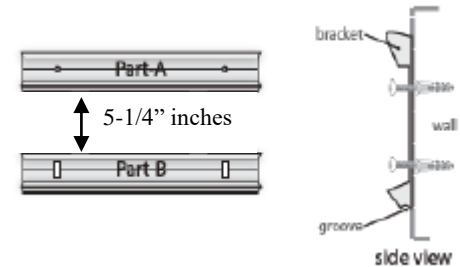# WALL MOUNT

PARTS INCLUDED:

☐ EXIT SIGN
☐ Part A (metal bracket: 2 circular holes)
☐ Part B (metal bracket: 2 rectangular holes)

INSTRUCTIONS:

1. Determine location for the wall mounted sign.
2. Position Part A on wall with groove side down and level.
3. Install Part A ½ inch below the top of the sign frame.
4. Drill two holes using a ¼" drill bit.
5. Install two anchors (not included) in drilled holes. ***
6. Use suitable fasteners (not included) through Part A and screw into place. **
7. Using a level, measure 5-1/4" below Part A to position Part B.
8. Position Part B with groove side down.
9. Drill holes and install anchors.
10. Part B's rectangular slotted holes allow for adjustment.
11. Hang top of exit sign on Part A.
12. Push bottom of exit sign into Part B and it will snap into place.

EXIT sign

5-1/4" inches

side view

*** Ceiling and walls made of different materials require different types of fasteners. Use fasteners suitable for the ceilings or walls in your building.

Always install products in compliance with your local building code. Check your local code before you install any sign to ensure your installation meets all criteria.